

ATS3BC0600 ATS3BC0800

MCCB Type Automatic Transfer Switch

Rated Current 500~800A Voltage 100~600VAC

Features

- Trouble-free Modular Design
- Easy Service & Maintenance
- ATS-01*PLC Controller with Voltage, Phase Monitoring, 168HR Exerciser & Protections
- TSP-01* Voltage Transformer Module-Change Voltages Easily Via Plug-In Connector
- BTS*-Transfer Switch Built With High Short Circuit Breaking Capacity & OCPD**MCCBs
- The Modules interconnected by Harness using High Voltage rated Plugs
- Complies with IEC 60947-6 Requirements***




* Pictured: ATS with enclosure, ATS-01, TSP-01 & BTS Switch, for more details, please check brochures & manuals

ATS Rated Operating Current & AC Rated Breaking Capacity

ATS Type	Pole	Rated Current (A) Ambient Temperature 40°C		AC Rated Breaking Capacity					
				Sym r.m.s(KA)		IEC 60947-2 Icu/Ics			
				240V	380V	415V	440V	500V	690V
ATS3BC0600	3P	500	600	35	25	25	20	18	-
ATS3BC0800	3P	700	800	50	45	35	30	25	16

*For special high breaking capacity requirements, please contact us.

Mechanical Specifications

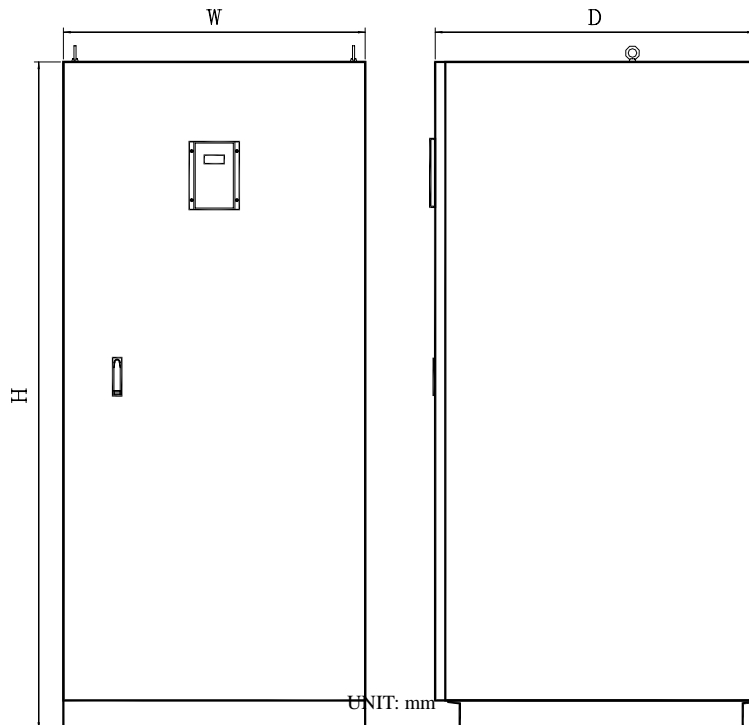

Enclosure P/N.	CA-225
H	1800
W	820
D	640
Thickness	2.0
Fixed Type	Floor
MCCB Capacity	3P 500~1600 A
Wire Portal	OB*
Dimensions	OB*
Outdoor Enclosures	Please contact us if rain-proof (for outdoor use) enclosure is needed.

Note: T & B stands for "2 portals on both Top & Bottom"

** OCPD :

Over Current Protection Device

*** IEC60947-6 Class CB :

ATS provided with over current releases and the main contacts of which are capable of making and are intended for breaking short circuit currents.

*** IEC60947-6 Utilization Category AC-33A :

1. Frequent Operations
2. Motor loads or mixed loads including motors, resistive loads and up to 30% incandescent lamp



McPherson Controls
MTS Power Products · McPherson Controls